


Machine has SuperATV Rear Windshield and Can-Am Front Windshield installed.



Roof

Bracket x 2

Use Brackets only if SuperATV Rear Windshield is installed.

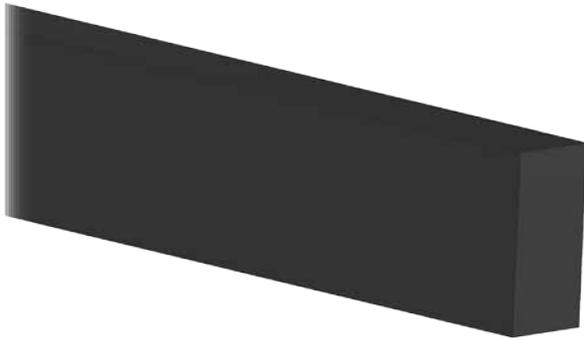

Seal



Foam x 2

(Kit contents continue on following page)

(1) piece will be used if SuperATV Rear Windshield is NOT installed. Keep remaining piece for future use.

**If Roof appears warped, place in direct sunlight for an hour.
 Roof will return to original molded shape.**

Read instructions and view illustrations before beginning.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-812-574-7777



8:00am - 9:00pm EST M-Th
 8:00am - 7:00pm EST Friday
 9:00am - 2:00pm EST Saturday

*Thank You
 For Choosing*



Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.


By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.


SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warranted if item was not installed properly, misused, or modified.

(Kit contents continued)


3x  M6-1.0 x 25mm Lg. BHCS

3x  M6 Sealing Washer


4x  M8-1.25 x 25mm Lg. BHCS



Rubber must face plastic when installing M6 Sealing Washer


4x  M8 Narrow Washer

3x  M6-1.0 Nylock Nut




6x - Cable Tie Mount

6x - Cable Tie

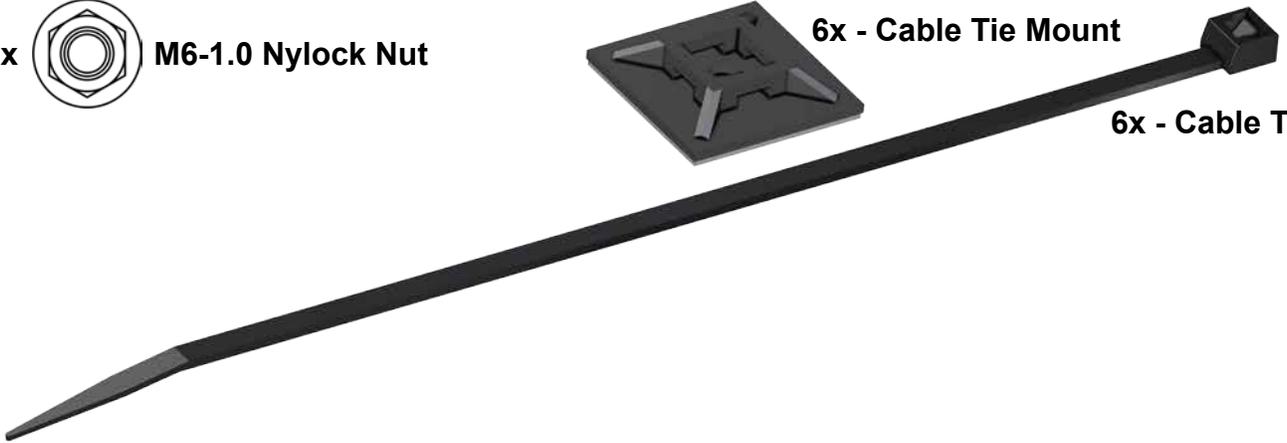

- Cut Seal in half and install to inside of Roof as shown.

(driver side)



Seal




start here and follow edge of Roof

- Install Foam to top of Frame in location shown.



- If present, install Foam to SuperATV Rear Windshield.
- Follow windshield edge as shown.

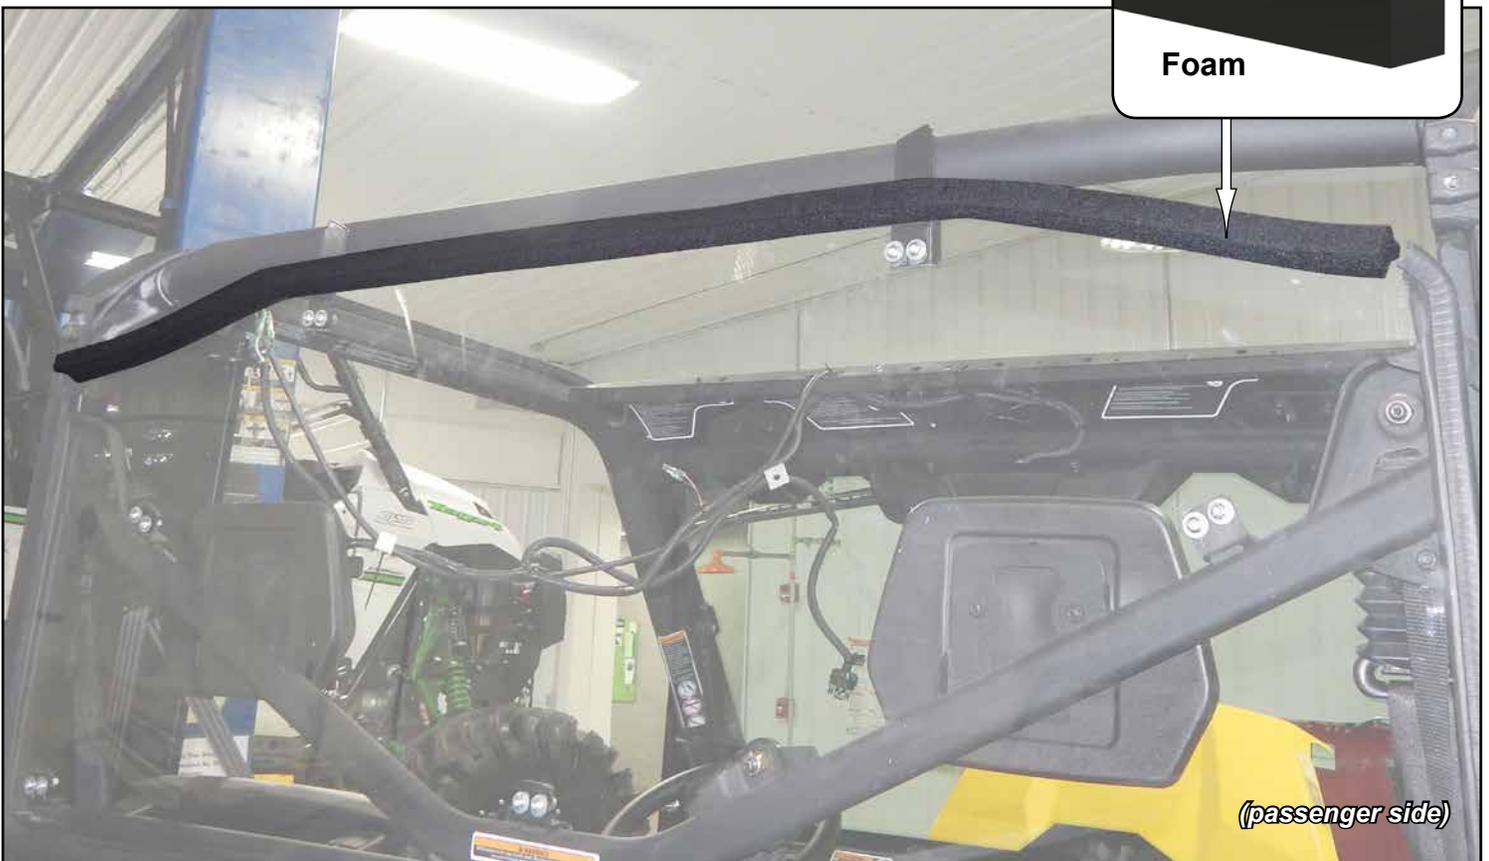


Install Brackets only if SuperATV Rear Windshield is installed.

- Replace current Brackets in Rear Windshield with Brackets included with Roof.
- Reuse hardware.




- Install Roof to machine with hardware shown.

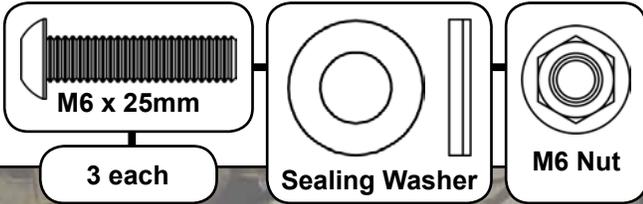


3 each




2 each

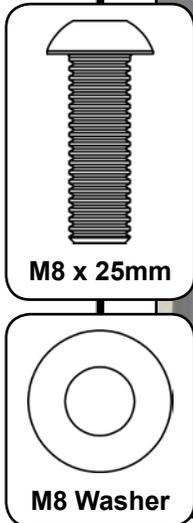

- Use provided Cable Tie Mounts and Cable Ties to secure wiring to Roof if applicable.



6x - Cable Tie Mount

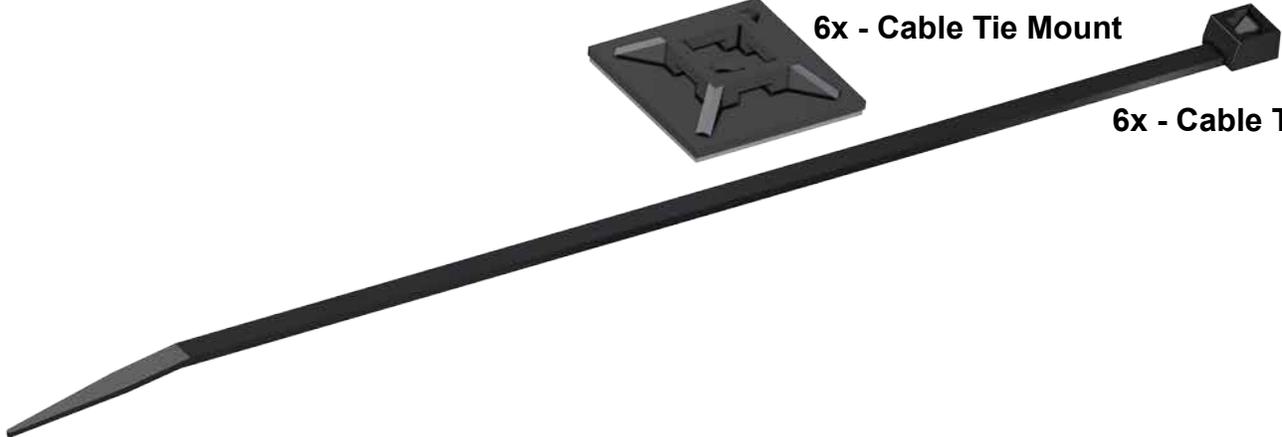

6x - Cable Tie